

Rec'd PCT/PTO 14 DEC 2004

PCT/IB 03 / 0 2 3 3 3

27.05.03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

10/517918

REC'D 25 JUN 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02077407.1

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:  
Application no.: 02077407.1  
Demande no:

Anmeldetag:  
Date of filing: 18.06.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Method and device for recording marks representing data in an information layer  
of an optical record carrier

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G11B7/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

Method and device for recording marks representing data in an information layer of an optical record carrier

EPO - DG 1

18. 06. 2002

The present invention relates to a method of recording marks <sup>(87)</sup>representing data in an information layer of a record carrier by irradiating the information layer by means of a pulsed radiation beam, each mark being written by a sequence of pulses, the recorded marks being erasable by irradiating the information layer with an erase radiation beam. The invention relates further to a corresponding optical recording device for recording marks representing data in an information layer of a record carrier by irradiating the information layer by means of a pulsed radiation beam, the device comprising a radiation source providing said radiation beam and a control unit for controlling the power of said radiation beam such that each mark is written by a sequence of pulses, the recorded marks being erasable by irradiating the information layer with an erase radiation beam.

Such a method and device are known from the WO01/04885 A1. Therein a mark is written in a phase change layer of a record carrier by a sequence of radiation pulses. A trailing power level having a value higher than the erase power level is introduced after a last write pulse in a sequence of radiation pulses. Additionally, the power level of the last write pulse in a sequence may be raised. This results in a reduced jitter of the marks being written, especially when writing at high recording speeds. In this way marks are written in a phase change layer of a record carrier. The area between two successive marks is referred to as a space. The pattern of marks and spaces on a record carrier represents the information stored on that record carrier.

A factor of two storage capacity increase of a rewritable optical recording media can be achieved by introduction of a second recording layer such as described in "Title Phase-Change Recording: Options for 10 to 20 GB (dual layer, high NA, and blue)", Wierenga H. A., Proceedings of the SPIE The International Society for Optical Engineering (USA), vol. 3401, p. 64-70, 1998. To access both recording layers the layer closer to the objective lens of the recording device needs to be transparent. Making of such a transparent recording layer requires a major change of the recording layer stack-design. In single layer discs, this stack consists typically of a metal mirror layer, dielectric interference layers and a phase-change layer. However, these types of stacks are not transparent due to the metal

mirror layer. Leaving out of the metal mirror layer in dual later discs has not only consequences for the object of behavior of the stack (that is becoming, at least partially transparent), but also for its thermal characteristics.

In transparent dual layer recording stacks transparent heat sinks are introduced to achieve at least moderate cooling of the phase-change layer without compromising the transparency of the stack. The slower cooling characteristics of such a stack results in heat accumulation causing two sorts of problems. First, during writing of marks longer cooling gaps in between the write pulses are needed. This can be achieved by using shorter write pulses. Second, at the beginning of a mark the temperature of the heat sink needs to be low. The most straightforward solutions are reduction of the erase power during the space write-strategy or introduction of a cooling gap before the first write pulse. However, experiments in optical recording systems (such as, for example, DVD) have shown that both strategies result in a poor overwrite performance.

It is therefore an object of the present invention to provide a method and a device for recording marks in an information layer of a record carrier by which a reduction of the temperature of a transparent heat sink is accomplished without compromising the overwrite performance.

This object is achieved according to the present invention by providing a method according to the preamble wherein said erase radiation beam has a first erase power level for a first erase period, a second erase power level higher than or equal to said first erase power level for a second erase period and a third erase power level lower than said second power level for a third erase period. The object is further achieved by providing a corresponding recording device as claimed in claim 11.

The present invention is based on the idea to divide the space write-strategy in at least two, preferably three, different power levels. At the beginning of a space, a one- or two-stage erase power level boost is used to heat the stack quickly. The initial stage of a one-stage boost or the first stage in case of a two-stage boost is needed to prevent re-crystallization at the end of the previous mark. Thereafter, that is after said initial stage or after the second boost of a two-stage boost, the erase power is lowered to a value which is substantially lower than that required in conventional space write-strategies without a boost

The combination of the above described new write-strategy and a stack with one transparent heat sink layer preferably made of Indium Tin Oxyde (ITO), especially results in a very good overwrite performance.

Embodiments of the invention are defined in the dependent claims.

- 5 Advantageous embodiments for the different power levels and the different erase periods used in the space write-strategy are defined in claims 2 to 7. Preferably the third erase power level is lower than the erase power level applied in conventional space write-strategies, while at least the second erase power level is higher than the conventional erase power level.

- 10 In an embodiment of the invention, the first and third erase power levels are substantially equal and lower than the second erase power level.

Furthermore, the sum of the first and second erase period is preferably shorter than half of the shortest effect (i.e., mark) length, for example a 1T duration for a code with 2T as shortest effect (i.e., mark) length.

- 15 The space write-strategy according to the present invention using a two-stage erase boost is preferably applied for direct overwrite (DOW) in a (semi-) transparent layer of an optical record carrier comprising at least two information layers. Write-strategies using such an erase-boost could, for example, be applied in DVD and DVR dual-layer recording.

- 20 The information layer is preferably of the type which has a phase which is reversibly changeable between a crystal phase and an amorphous phase. Because of the similarity of the cooling problem in dual-layer record carriers and in high speed recording of single layer record carriers, the method and recording device according to the present invention, in which the above described erase power level boost is applied, could also be applied advantageously for high speed CD-RW, DVD and DVR recording.

- 25 The invention will now be explained in more detail hereinafter on the basis of preferred embodiments and with reference to the accompanying drawings, in which

Fig. 1a shows a cross-section of a dual-layer record carrier,

Fig. 1b shows a cross-section of a semi-transparent information layer,

- 30 Fig. 2 shows diagrams illustrating a data signal and a corresponding control signal for controlling the power levels of the radiation beam according to an embodiment of the present invention having a two-stage boost,

Fig. 3 shows results of measurements of the single track jitter illustrating the advantageous effect of the invention,

Fig. 4 shows the block diagram of a recording device according to the invention, and

Fig. 5 shows diagrams illustrating control signals according to embodiments of the present invention having an one-stage boost.

5

Fig. 1a shows a schematic representation of a dual-layer disc shaped record carrier 1. The disc 1 comprises a poly-carbonate substrate 10, two recording layers of the phase-change type 11, 13 separated by a spacer layer 12 and a cover layer 14. Data recorded in the information layers 11, 13 are written or read by a radiation beam 2, such as a laser light beam. To be able to read the data from or to write data to the information layer 11, the other information layer 13 being closer to the surface facing the laser beam 2 is, at least partially, transparent.

10

Fig. 1b shows an example of a cross-section of such a semi-transparent information layer 13. As shown, it comprises a phase-change layer 132 and a transparent heat sink layer 134 which are separated and covered by dielectric layers 131, 133, 135. Other stack arrangements are alternatively possible.

15

Fig. 2 shows diagrams of two signals used in an embodiment of the present invention, a digital data signal 20 and a control signal 30. Fig. 2a gives the value of the digital data signal 20 as a function of time, the value of the signal representing information to be recorded. When recording this data signal 20 a "high" period 21 is recorded as a mark having a length corresponding to the duration of the "high" period. A "low" period 22 is recorded as a blank area, a space, situated between the marks and having a length corresponding to the duration of the "low" period. In general, the length of a mark is substantially equal to the number of channel bit periods (number of periods of the data clock) of the data signal times the writing speed.

20

25

The data is written in an optical record carrier 1 having one or more information layers, such as an optical record carrier having two information layers as shown in Fig. 1. The marks representing the data are written along a track in the information layer by irradiating the information layer by a pulsed radiation beam. The marks are areas of the information layer having optical characteristics different from their surrounding which makes optical reading of marks possible.

30

Fig. 2b shows a control signal 30 corresponding to the data signal 20 in an

embodiment of the invention. The control signal 30 is a sequence of pulses, the duration of which is proportional to the duration of the "high" period of the data signal 20. The control signal 30 is used to control the recording device.

assumed that the power level of the radiation beam is proportional to the level of the control signal. Fig. 2b shows, as a function of time, a last pulse 31 of a sequence of write pulses for writing a mark 21. These write pulses have a write power level  $w$ , while the power level between the write pulses in a sequence is a bias power level  $b$ . Furthermore, a first pulse 32 of a sequence of write pulses for writing the next mark 21 after the space 22 is shown on the right side.. Previously written marks, if any, between the marks 21 being written are erased by applying an erase write-strategy according to a preferred embodiment of the present invention.

At the beginning of the space 22 a two-stage boost is used to heat the stack quickly. The low level first stage 33 having a first erase power level  $e1$  for a first erase period  $t1$  is used to prevent re-crystallization at the end of the previous mark 21. Thereafter, a second boost 34 is applied having a second erase power level  $e2$  higher than the first erase power level  $e1$  for a second erase period  $t2$ . After the second boost 34 the erase power is lowered to a third erase power level  $e3$  being lower than the first erase power level  $e1$  for a third erase period  $t3$ , that is, for the remaining time of the space 22 (reference number 35).

Also shown as a dashed line in this diagram is a conventional space write-strategy without erase-boost according to the invention. In such a conventional space write-strategy, the erase power level is set to a constant level  $e0$  being higher than the third erase power level  $e3$  during the whole period for writing the space 22. It should be noted that also a one-stage boost, where  $e1$  is equal to  $e2$ , can be used.

The net result of the space write-strategy according to the invention is the desired reduction of the stack temperature. The combination of this new write-strategy and a stack with one transparent heat sink layer as shown in Fig. 1 results in a very good overwrite performance as can be seen from Fig. 3. Here the average single track (ST) jitter is shown as function of the number of direct overwrite (DOW) cycles. A conventional write-strategy with a cooling gap at the end of the mark shows poor overwrite performance (line 41 with diamonds), whereas boosting of the erase power level at the beginning of a space together with a reduced erase power  $e3$  results in good overwrite performance (line 42 with squares) as is illustrated in Fig. 2b

It should be noted that the optimal values of the erase power levels  $e1$ ,  $e2$ ,  $e3$  as well as the erase periods  $t1$ ,  $t2$ ,  $t3$  depend on the properties of the recording medium, the laser pulse, and the laser spot on the information layer. As an example, the following values could be used:

$t1=1/2T$ ;  $t2=1/2T$ ;  $e1=2.3mW$ ;  $e2=2.6mW$ ;  $e3=1.1mW$ .

It should be noted that instead of the two-stage boost as is shown in Fig. 2b, alternatively a one-stage boost can be used. An embodiment of such an one-stage boost is illustrated by Fig. 5a where the first and second erase power levels  $e_1$  and  $e_2$ , which together form the one-stage boost, are equal but higher than the third erase power level  $e_3$ . The first and second erase power levels  $e_1$  and  $e_2$  of the boost are higher than the constant erase power level  $e_0$  used in a conventional space write-strategy. A further embodiment is illustrated by Fig. 5b where the first and third erase power levels  $e_1$  and  $e_3$  are equal, but lower than the second erase power level  $e_2$  forming the one-stage boost. Again, the second erase power levels  $e_2$  of the boost is higher than the constant erase power level  $e_0$  used in a conventional space write-strategy.

It should be noted that the term "equal" does not necessarily mean "exactly equal", but rather "approximately equal" since slight differences from the equal level do not take the advantages of the invention away.

Fig. 4 shows an embodiment of a recording device according to the present invention for recording data on a disc-shaped optical record carrier 1. Alternatively, the record carrier may be in the form of a tape. A data signal  $S_D$ , comprising the information to be recorded, is applied to a control unit 60. A current source 61 within the control unit 60 has five outputs, A, B, C, D and E. Output A provides a current which, when fed into a radiation source 51, through a control signal  $S_C$ , will result in a radiation beam 52 having a write power level ( $w$ ). Likewise, outputs B, C, D and E provide currents resulting in the bias power level ( $b$ ), the first erase power level ( $e_1$ ), the second erase power level ( $e_2$ ) and the third erase power level ( $e_3$ ), respectively. The current of each output A, B, C, D and E can be selected by a switch unit 62. The switch unit 62 is operated by a pattern generator 63 controlled by the data signal  $S_D$  and a clock signal  $S_K$ . The pattern generator 63 transforms the data signal  $S_D$  into the control signal having the power levels according to a desired pattern. The clock signal  $S_K$  is obtained from a clock generator 58.

The control signal  $S_C$ , provided at the output of the control unit 60, is applied to the radiation source 51 and controls the power of the radiation beam 52 generated by the radiation source 51. The radiation beam is focussed onto an information layer 11 (or 13) of the record carrier 1 by a lens 53. The disc-shaped record carrier 1 is rotated around its center by a motor 54.



## CLAIMS:

EPO - DG 1

18. 06. 2002

(87)

1. A method of recording marks representing data in an information layer of a record carrier by irradiating the information layer by means of a pulsed radiation beam, each mark being written by a sequence of pulses, the recorded marks being erasable by irradiating the information layer with an erase radiation beam,  
5 characterized in that said erase radiation beam has a first erase power level for a first erase period, a second erase power level higher than or equal to said first erase power level for a second erase period and a third erase power level lower than said second erase power level for a third erase period.
- 10 2. A method as claimed in claim 1, wherein said third erase power level is lower than said first erase power level.
3. A method as claimed in claim 1, wherein said first erase power level and said third erase power level are substantially equal  
15 and lower than said second erase power level.
4. A method as claimed in claim 1, wherein said second erase power level is lower than the write power level (w) of said pulses of said pulsed radiation beam for recording marks.  
20
5. A method as claimed in claim 1, wherein said third erase power level is higher than the bias power level (b) between said pulses of said pulsed radiation beam for recording marks.
- 25 6. A method as claimed in claim 1, wherein said first erase period and said second erase period are shorter than said third erase period.
7. A method as claimed in claim 1,

wherein the sum of said first erase period and of said second erase period are shorter than half of the shortest mark being recorded.

8. A method as claimed in claim 1,  
5 wherein said information layer has a phase which is reversibly changeable between a crystal phase and an amorphous phase.
9. A method as claimed in claim 1,  
wherein said record carrier comprises at least two information layers.
10. A method as claimed in claim 9,  
wherein at least one of said at least two information layers is an at least partially transparent layer.
11. A recording device for recording marks representing data in an information layer of a record carrier by irradiating the information layer by means of a pulsed radiation beam, the device comprising a radiation source providing said radiation beam and a control unit for controlling the power of said radiation beam, such that each mark is written by a sequence of pulses and the recorded marks being erasable by irradiating the information layer  
20 by an erase radiation beam,  
characterized in that control unit is operative for controlling said radiation beam such that said erase radiation beam has a first erase power level for a first erase period, a second erase power level higher than or equal to said first erase power level for a second erase period and a third erase power level lower than said second erase power level for a third erase period.
12. A recording device as claimed in claim 11,  
wherein said control unit is operative for controlling said radiation beam such that the third erase power level is lower than the first erase power level.
13. A recording device as claimed in claim 11,  
30 wherein said control unit is operative for controlling said radiation beam such that the first erase power level and the third erase power level are substantially equal and lower than the

## ABSTRACT:

EPO - DG 1

18. 06. 2002

(87)

The present invention relates to a method of recording marks representing data in an information layer of a record carrier by irradiating the information layer by means of a pulsed radiation beam, each mark being written by a sequence of pulses, the recorded marks being erasable by irradiating the information layer with an erase radiation beam. In order to

5 achieve a reduction of the temperature of a transparent heat sink of a dual-layer optical recording medium without compromising of the direct overwrite of old data it is proposed according to the present invention that said erase radiation beam has a first erase power level (e1) for a first erase period (t1), a second erase power level (e2) higher than or equal to said first erase power level (e1) for a second erase period (t2) and a third erase power level (e3)

10 lower than said second erase power level (e2) for a third erase period (t3).

(Fig. 2b)

1/3

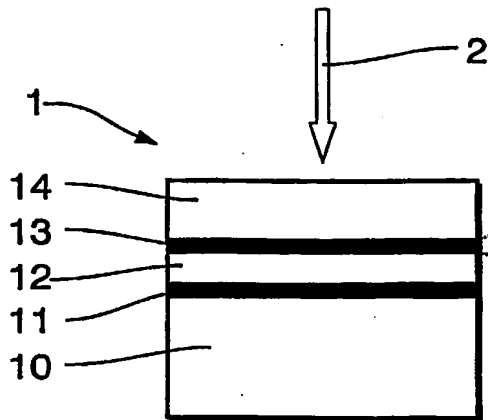


FIG. 1a

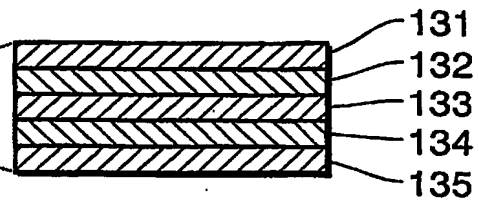


FIG. 1b

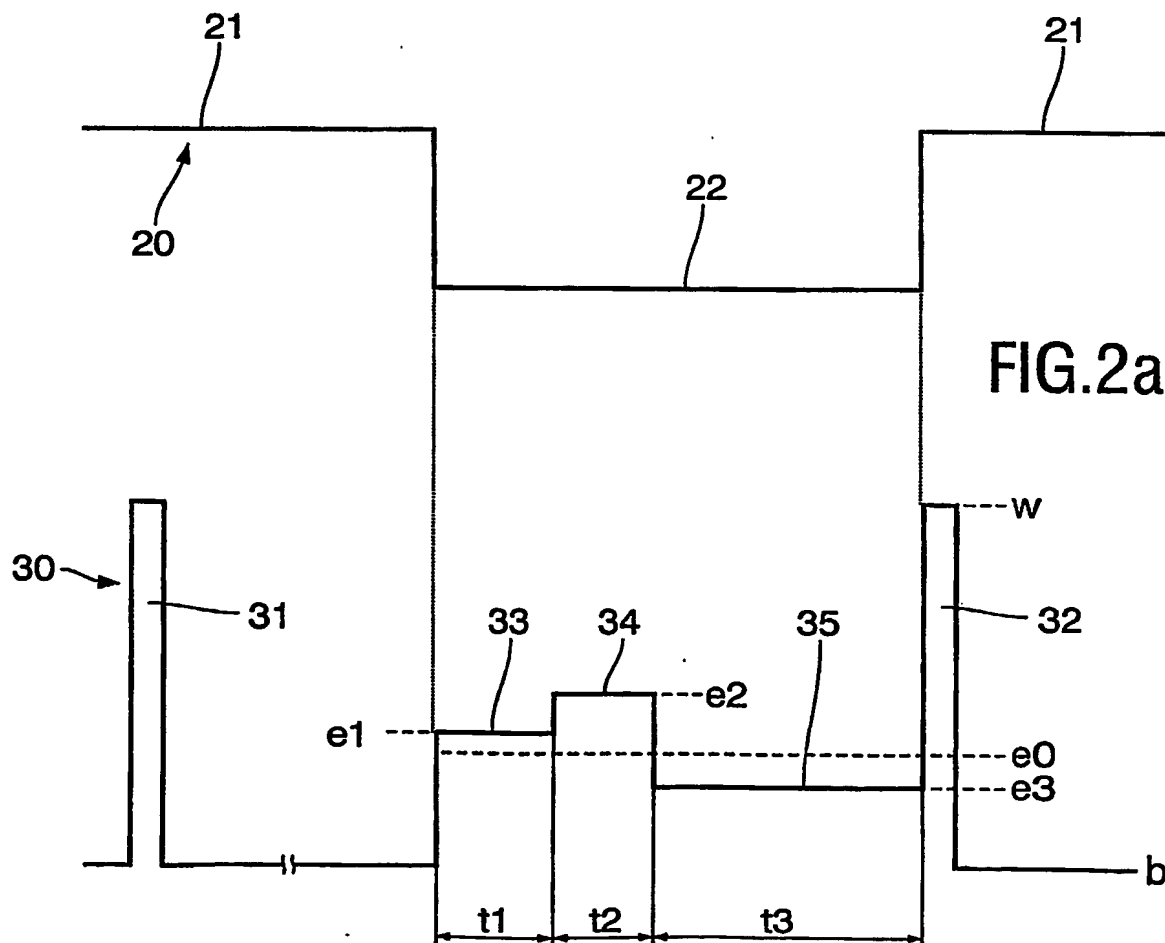


FIG. 2a

FIG. 2b

2/3

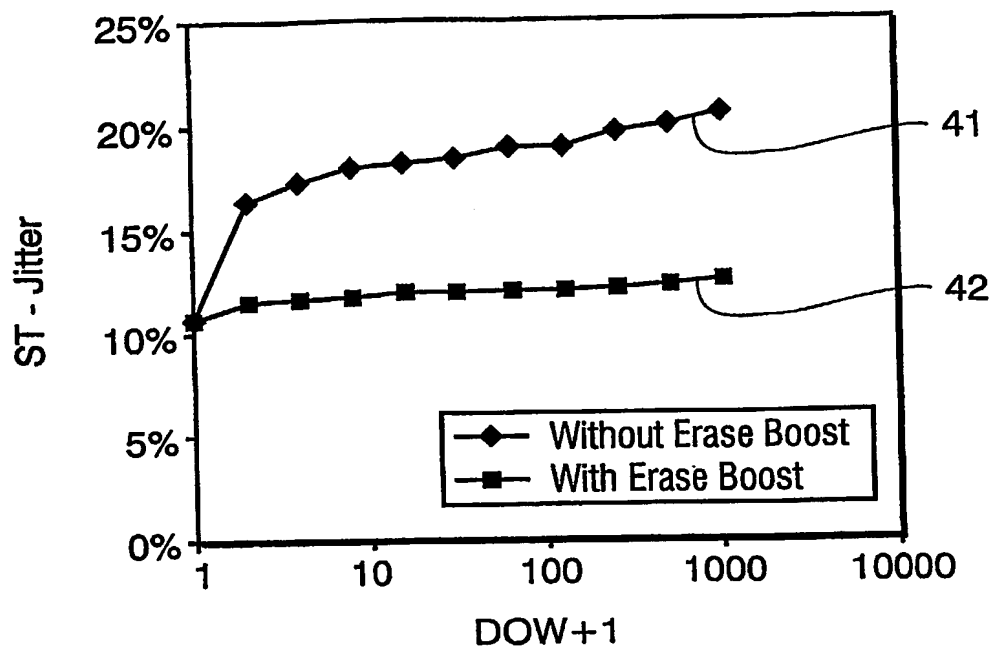
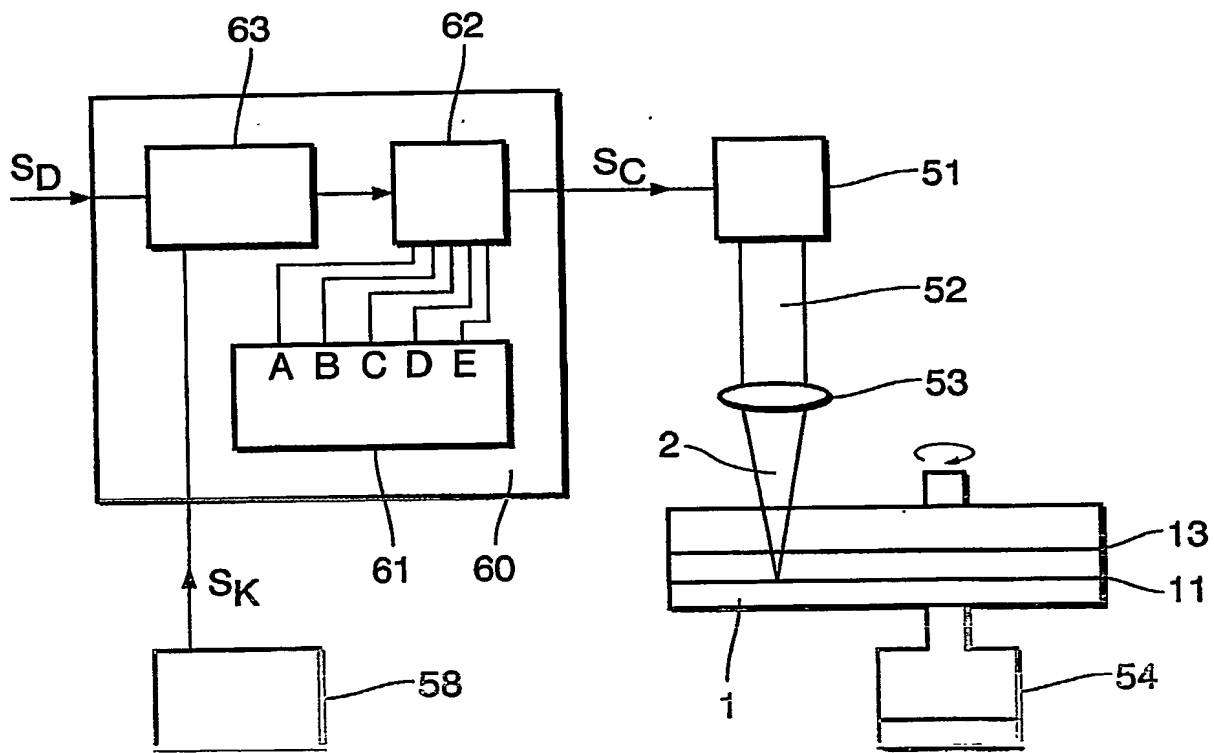


FIG.3



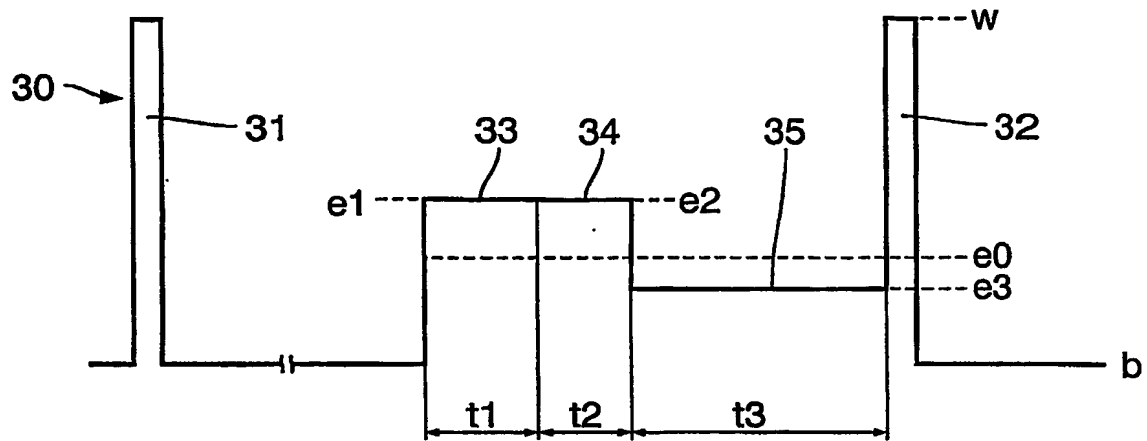


FIG. 5a

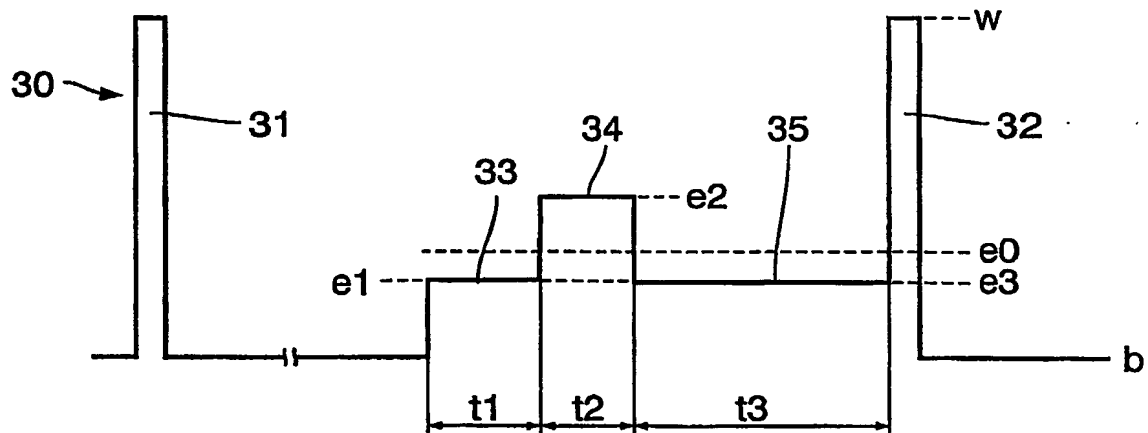


FIG. 5b

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**